

Product Catalogue

Water pumps
for Home & Garden

2021



THE ELPUMPS® PRODUCT FAMILY



Clean water pumps **6** **8** Sump pumps

Dirty water pumps **10** **12** Sewage pumps

High-pressure submersible pumps **14** **16** Deep well pumps

Centrifugal pumps **18** **20** Garden jet pumps

Automatic garden jet pumps **22** **24** Domestic waterworks, 25 L

Automatic domestic waterworks, 25 L **26** **28** Domestic waterworks, 50 L

Automatic domestic waterworks, 50 L **30** **32** Accessories




ELPUMPS



WHO ARE WE?

Elpumps is a European manufacturer of pumps that uses advanced technology to produce goods of the highest quality. Started as a family firm, the parent company was founded almost three decades ago by the current owners. Thanks to rapid and stable growth, it grew into an international corporation by the start of the 2000s. The Elpumps international headquarters is situated in Switzerland, while the manufacturing and development center is located in Hungary, within the European Union.

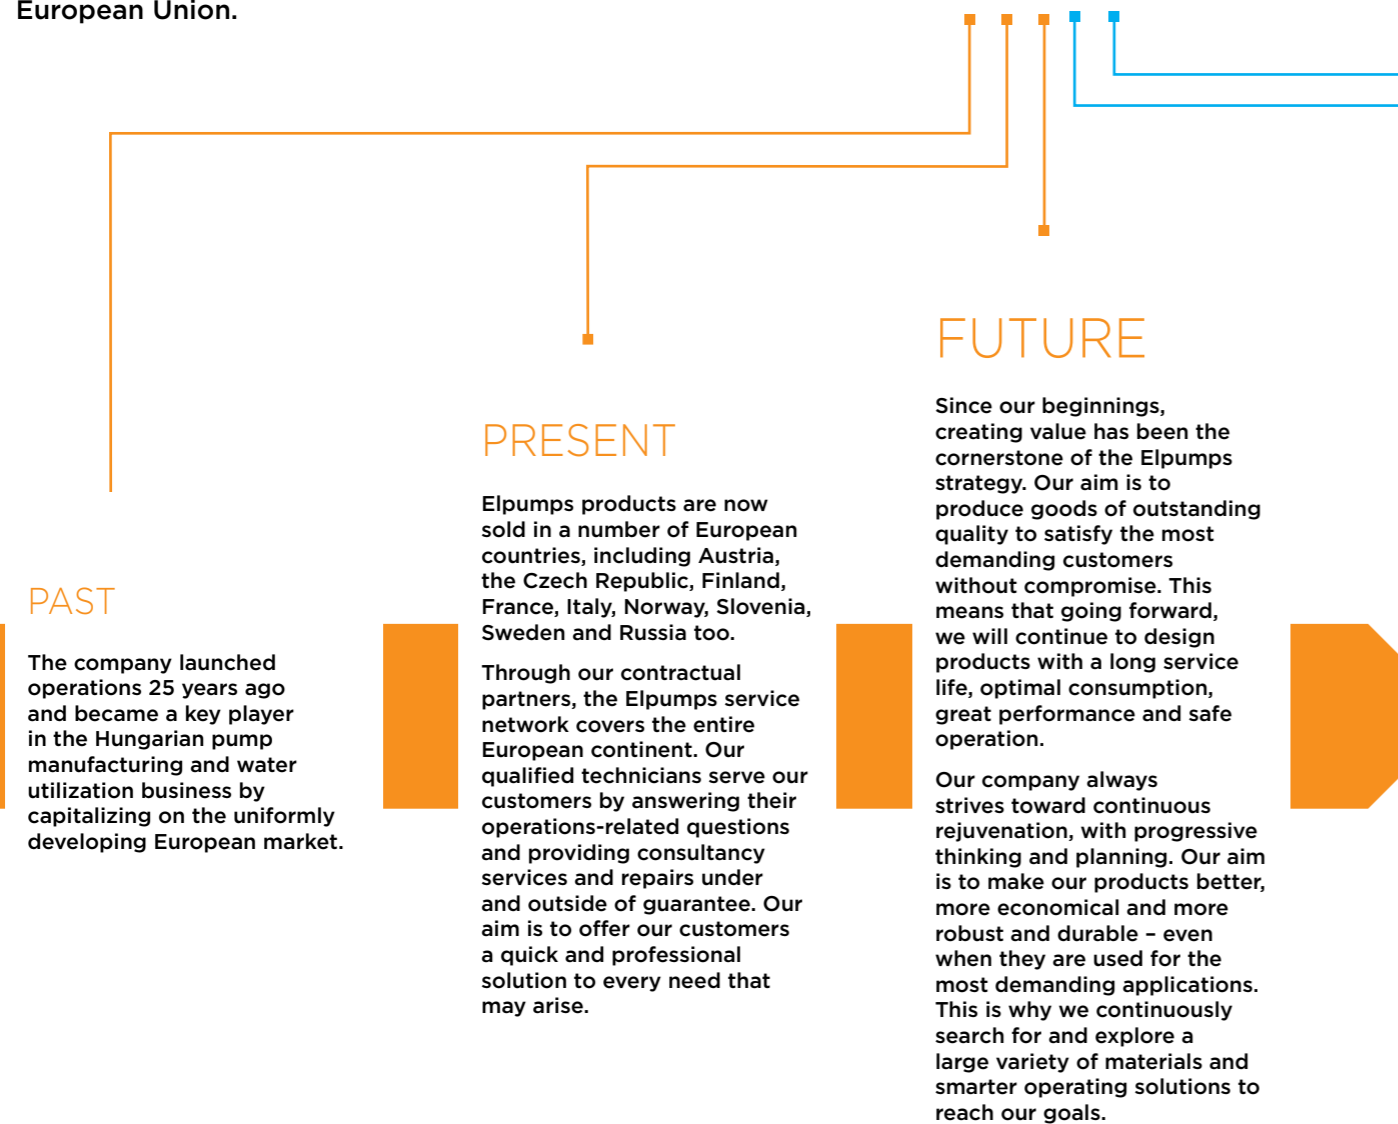

INNOVATION

The key objective of our research division is to continuously modernize and develop the Elpumps product catalogue by utilizing new technologies and modern materials with better specifications.

However, the basic operating principles of pump manufacturing have long remained constant. That means that our products already use proven and reliable technologies, and only need improvements to provide more efficient and convenient operations and a higher level of performance.

Our customers can order our products quickly and securely from the comfort of their own home. We launched our manufacturer's webshop in 2017 in response to increasing demand for our products and positive feedback from satisfied clients. We aim to build on our shared success and make the webshop available in a number of European countries so our customers can purchase our high-quality products directly from the manufacturer and enjoy the best available prices.

To ensure quick and reliable delivery, we only work with well-respected, professional logistics partners in every country where we operate.

PARTNERS

To provide solutions for our customers' needs and to make our quality products available in more and more countries, we have formed partnerships with a number of local distributors. Thanks to our solid reputation, our network of retail and wholesale partners is growing.

Our successful partnerships are based on shared values, a thorough knowledge of local needs, and our high-quality products and services.



SUBMERSIBLE PUMPS

FOR CLEAN WATER

CT 3274 W CT 4274 W CT 3674

Elpumps submersible pumps for clean and slightly dirty water are renowned for their high efficiency, low long-term costs and high operating reliability, making them ideal for a wide variety of applications. The Elpumps CT series offers high resistance to suspended solids, thermal overload protection and easy maintenance. The pumps can even be fully submerged up to 5 meters for efficient water removal, pumping clean water at low pressure with a flow rate of up to 15,000 liters/hour thanks to their powerful 600W / 800W motors.

STRUCTURE

The pump motor casing and shaft are composed of INOX stainless steel, and the impeller and other structural elements are made of high-grade, corrosion-proof NORYL PPO polymer. The shaft is jointly sealed with a spring-loaded seal ring (gasket) and a modern slide-ring axial seal.




FEATURES AND BENEFITS

- Powerful 600W / 800W motor
- Flow rate of up to 15,000 liters/hour
- Maximum immersion depth of 5 meters
- Maximum delivery head of up to 12 meters
- Durable, non-corrosive, rust-proof materials
- The pre-filter screens solid pieces of up to 5 mm
- Drawing water from even 5 mm off the bottom
- Integrated float switch, auto start/stop function
- Fitted with 10-meter H05 RN-F 3G 0.75 mm² cable
- Thermal overload protection
- 2-year guarantee

APPLICATION

- Automatic pumping of clean water from wells, tanks or reservoirs
- Flood irrigation in greenhouses, horticulture and small-scale agriculture
- Water supply for livestock farming
- Emergency draining of slightly dirty water from flooded areas or rooms
- Lowering groundwater
- Rainwater harvesting
- Emptying of pools, ponds, sumps, flooded cellars, flat roofs and boat bilges

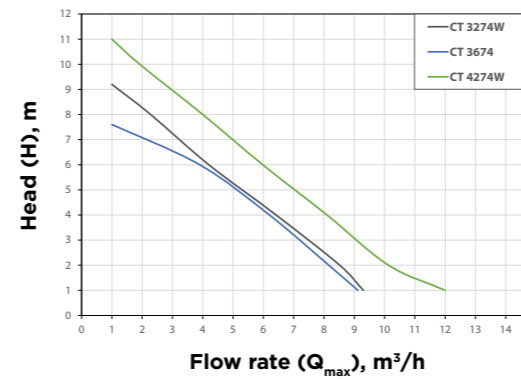

	CT 3274 W	CT 4274 W	CT 3674
Maximum power input	600 W	800 W	600 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum immersion depth	5 m	5 m	5 m
Maximum flow rate	10 m ³ /h	15 m ³ /h	10,8 m ³ /h
Maximum delivery head	10 m	12 m	8 m
Discharge port diameter	1 ¼"	1 ¼"	1 ¼"
Maximum delivery temperature	35 °C	35 °C	35 °C
Power cable type	H05 RN-F 3G 0,75 mm ²	H05 RN-F 3G 0,75 mm ²	H05 RN-F 3G 0,75 mm ²
Power cable length	10 m	10 m	10 m
Gross weight	5 kg	5,5 kg	5 kg
Package dimensions	160 x 190 x 325 mm	160 x 190 x 325 mm	160 x 190 x 365 mm

SUBMERSIBLE PUMPS

FOR DIRTY WATER

CT 2274 S CT 3274 S CT 4274 S

Elpumps submersible pumps for dirty water are renowned for their high efficiency, low long-term costs and high operating reliability, making them ideal for a wide variety of applications. Elpumps CT series water pumps for dirty water offer high resistance to suspended solids, thermal overload protection and easy maintenance. The pumps can be fully submerged up to 5 meters for efficient water removal, pumping clean water at low pressure with a flow rate of up to 16,000 liters/hour thanks to the powerful 450W / 650W / 850W motors.


APPLICATION

- Reliable pumping of sewage with dirt particles up to 30 mm in size
- Draining of slightly dirty water from construction sites
- Automatic draining of dirty water and sewage from cesspools, wells, tanks or reservoirs
- Flood irrigation in greenhouses, horticulture and small-scale agriculture
- Water supply for livestock farming
- Emergency draining of flooded areas or rooms
- Lowering groundwater
- Rainwater harvesting
- Emptying of pools, ponds, sumps and flooded cellars



FEATURES AND BENEFITS

- Powerful 450W / 650W / 850W motor
- Flow rate of up to 16,000 liters/hour
- Maximum immersion depth of 5 meters
- Maximum delivery head of up to 10 meters
- Durable, non-corrosive, rust-proof materials
- Able to pass solids of up to 30 mm in diameter
- Integrated float switch, auto start/stop function
- Fitted with 10-meter H05 RN-F 3G 0.75 mm² cable
- Thermal overload protection
- 2-year guarantee

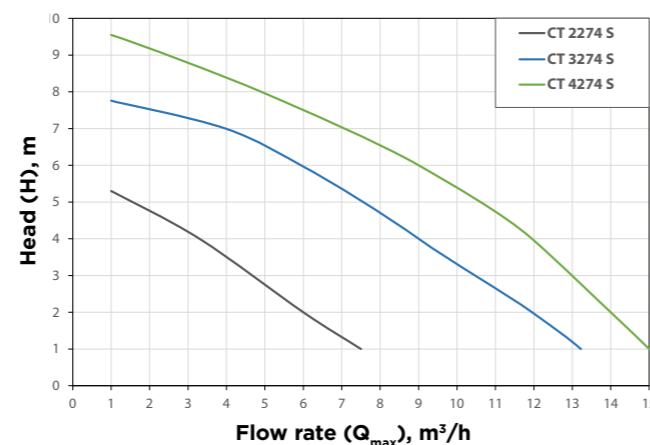

STRUCTURE

The pump motor casing and shaft are composed of INOX stainless steel, and the impeller and other structural elements are made of high-grade, corrosion-proof NORYL PPO polymer. The shaft is jointly sealed with a spring-loaded seal ring (gasket) and a modern slide-ring axial seal.



	CT 2274 S	CT 3274 S	CT 4274 S
Maximum power input	450 W	650 W	850 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum immersion depth	5 m	5 m	5 m
Maximum flow rate	9 m ³ /h	14 m ³ /h	16 m ³ /h
Maximum delivery head	6 m	8 m	10 m
Discharge port diameter	1 ¼"	1 ¼"	1 ¼"
Maximum delivery temperature	35 °C	35 °C	35 °C
Maximum grain size	20 mm	30 mm	30 mm
Power cable type	H05 RN-F 3G 0,75 mm ²	H05 RN-F 3G 0,75 mm ²	H05 RN-F 3G 0,75 mm ²
Power cable length	10 m	10 m	10 m
Gross weight	4,5 kg	5 kg	5,5 kg
Package dimensions	160 x 190 x 325 mm	160 x 190 x 325 mm	160 x 190 x 325 mm

FREE-FLOW (VORTEX)

SUBMERSIBLE PUMPS FOR DIRTY WATER



BTSZ 400 BTSZ 400 SPECIAL BTSZ 600 SPECIAL NEPTUN NEPTUN INOX

Elpumps free-flow (Vortex) submersible pumps provide a free flow-through passage of solids and liquids, minimizing the risk of jamming and low performance. Tough, durable, corrosion-proof materials make these pumps ideal for a wide range of dirty water pumping applications. Each pump is fitted with a low-consumption electric motor with overload protection and a float switch for automatic water level control.

Stylish design, improved technology and innovative materials are the main features behind the new Elpumps NEPTUN free-flow (Vortex) pumps, engineered for easy use and extreme reliability. As the Vortex system allows dirty water drainage without fear of the impeller clogging, Elpumps NEPTUN water pumps can be used for domestic and industrial applications where the water, such as groundwater, sewage water or other types of surface water, contains suspended solids of up to 30 mm.

STRUCTURE

The pump motor casing and shaft are composed of INOX stainless steel, the hydraulic case is constructed of cast iron or INOX steel, and the impeller is made of high-grade, corrosion-proof NORYL PPO polymer, gray cast iron or INOX steel. The shaft is jointly sealed with a spring-loaded seal ring (gasket) and a modern slide-ring axial seal.

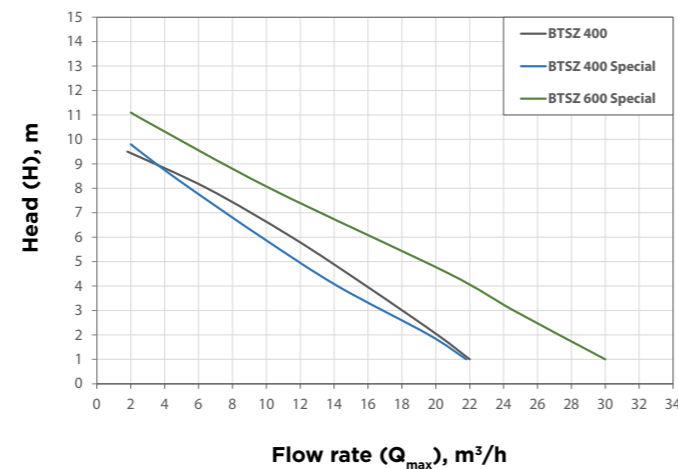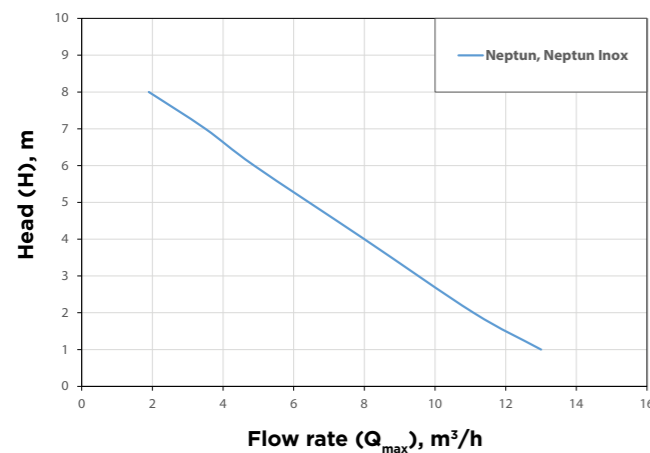

APPLICATION

- Reliable pumping of sewage with dirt particles up to 35 mm in size
- Draining of slightly dirty water from construction sites
- Automatic draining of dirty water from cesspools, wells, tanks or reservoirs
- Flood irrigation in greenhouses, horticulture and small-scale agriculture
- Water supply for livestock farming
- Emergency draining of flooded areas or rooms
- Lowering groundwater
- Rainwater harvesting
- Emptying of pools, ponds, sumps and flooded cellars

FEATURES AND BENEFITS

- Powerful 800W / 1200W / 1600W motor
- Flow rate of up to 32,000 liters/hour
- Maximum immersion depth of 5 meters
- Maximum delivery head of up to 12 meters
- Durable, non-corrosive, rust-proof materials
- Able to pass solids of up to 35 mm in diameter
- Integrated float switch, auto start/stop function
- Fitted with 10-meter H07 RN-F 3G 0.75/1 mm² cable
- Thermal overload protection
- Light weight and compact size (8 kg)
- 2-year guarantee

INOX
stainless steel
design



	BTSZ 400	BTSZ 400 SPECIAL	BTSZ 600 SPECIAL	NEPTUN	NEPTUN INOX
Maximum power input	1200 W	1200 W	1600 W	800 W	800 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum immersion depth	5 m	5 m	5 m	5 m	5 m
Maximum flow rate	24 m³/h	24 m³/h	32 m³/h	15 m³/h	15 m³/h
Maximum delivery head	10 m	11 m	12 m	9 m	9 m
Discharge port diameter	1 ½"	1 ½"	1 ½"	1 ¼"	1 ¼"
Max. delivery temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Maximum grain size	35 mm	35 mm	35 mm	30 mm	30 mm
Power cable type	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 0,75 mm²
Power cable length	10 m	10 m	10 m	10 m	10 m
Gross weight	13 kg	12,5 kg	15 kg	8 kg	5 kg
Package dimensions	220 x 185 x 450 mm	220 x 185 x 450 mm	220 x 185 x 450 mm	200 x 165 x 380 mm	200 x 165 x 380 mm

SUBMERSIBLE CUTTER PUMPS

FOR SEWAGE

- BT 4877 K
- BT 4877 K INOX
- BT 4877 K SPECIAL
- BT 6877 K
- BT 6877 K INOX
- BT 6877 K SPECIAL

Elpumps submersible cutter pumps for sewage are engineered for maximum reliability and efficiency. The Elpumps BT series is specifically designed for a range of dewatering, drainage and wastewater applications, where solids have to be cut into small particles to enable the liquid to move smoothly and minimize the clogging that may occur with regular pumps. Elpumps cutter pumps can handle waste solids of up to 30 mm and feature automatic shutdown when the water level drops, as well as thermal overload protection. For additional protection, Elpumps cutter pumps are equipped with a residual-current device that instantly breaks the electric circuit when the impeller becomes clogged to prevent serious damage to the motor.



STRUCTURE



The Elpumps submersible cutter pump casing and shaft are composed of INOX stainless steel, with excellent resistance to aggressive sewage waters. The engine cover is made of corrosion-proof plastic or INOX steel, and the hydraulic case and impeller are made of cast iron. The shaft is sealed with a modern ceramic-silicon axial seal. The durable materials ensure reliable and efficient operation and the long life of the pump.

APPLICATION

- Pumping of sewage with small solid particles or organic waste, where grinding is necessary
- Reliable pumping of sewage with dirt particles up to 30 mm in size
- Draining of slightly dirty water from construction sites
- Automatic draining of dirty water from cesspools, wells, tanks or reservoirs

FEATURES AND BENEFITS

- Powerful 900W / 1600W motor
- Flow rate of up to 28,000 liters/hour
- Maximum immersion depth of 5 meters
- Maximum delivery head of up to 18 meters
- Durable, non-corrosive, rust-proof materials
- Able to pass solids of up to 30 mm in diameter
- Integrated float switch, auto start/stop function
- Fitted with 10-meter H07 RN-F 3G 1 mm² cable
- Thermal overload protection
- 2-year guarantee

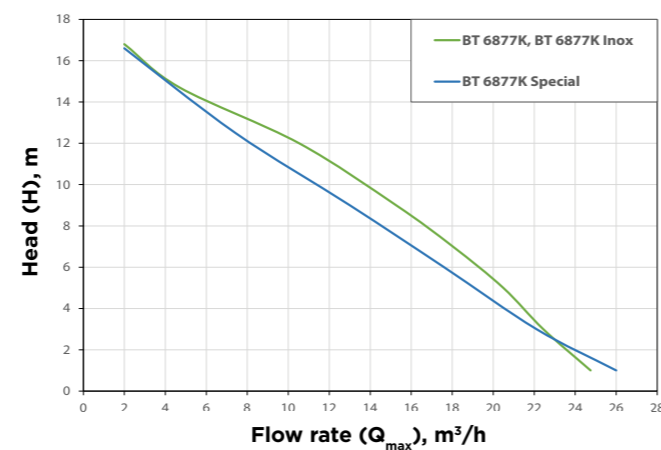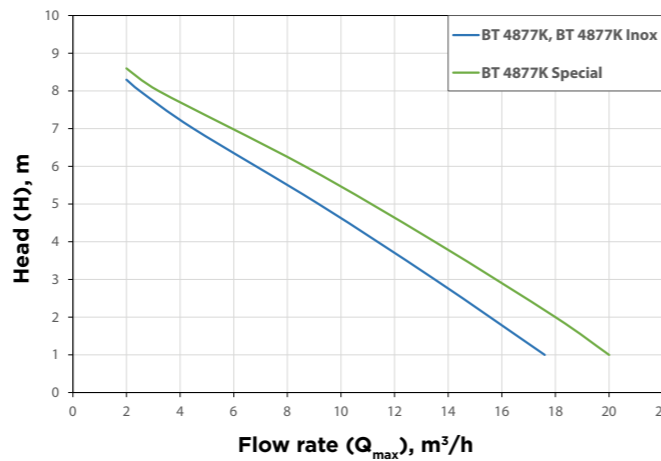

	BT 4877 K	BT 4877 K INOX	BT 4877 K SPECIAL	BT 6877 K	BT 6877 K INOX	BT 6877 K SPECIAL
Maximum power input	900 W	900 W	900 W	1600 W	1600 W	1600 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum immersion depth	5 m	5 m	5 m	5 m	5 m	5 m
Maximum flow rate	20 m ³ /h	20 m ³ /h	22 m ³ /h	26 m ³ /h	26 m ³ /h	28 m ³ /h
Maximum delivery head	10 m	10 m	10 m	18 m	18 m	18 m
Discharge port diameter	1 ¼"	1 ¼"	1 ½"	1 ¼"	1 ¼"	1 ½"
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	10 m	10 m	10 m	10 m	10 m	10 m
Gross weight	11 kg	11 kg	11 kg	15 kg	15 kg	15 kg
Package dimensions	220 x 190 x 450 mm	220 x 190 x 450 mm	220 x 190 x 450 mm	220 x 190 x 450 mm	220 x 190 x 450 mm	220 x 190 x 450 mm

SUBMERSIBLE PRESSURE PUMPS

FOR CLEAN WATER

MULTI DRAIN 5600/34 MULTI DRAIN 5600/54

The Multi Drain series incorporates Elpumps' highest hydraulic performance submersible deep-well pumps, built to deliver optimum performance during periods of high demand.

Characterized by a robust build, a powerful 900W / 1200W motor, 3-5 high-performance impellers and a suction head of up to 54 m, Multi Drain pumps are perfect for all kinds of deep-well drainage tasks. The tough, durable, corrosion-proof materials offer high resistance to suspended solids. Multi Drain pumps are fitted with an integrated automatic float switch and have a low-consumption electric motor with thermal overload protection.

Ideal for pumping clean water from bored wells, irrigating gardens and green areas by flooding or sprinkler and for dewatering flooded areas, pools, fountains and hobby applications in general, Elpumps Multi Drain pumps are perfect for both domestic and light commercial use.

STRUCTURE

The pump motor casing and shaft are composed of INOX stainless steel, the hydraulic case is constructed of cast iron, and the impellers are made of high-grade, corrosion-proof NORYL PPO polymer. The shaft is jointly sealed with a spring-loaded seal ring (gasket) and a modern slide-ring axial seal.


APPLICATION

- Automatic water pumping from bored wells, tanks or reservoirs
- Delivering clean water to operate high-pressure garden irrigation systems
- Irrigation in greenhouses, horticulture and small-scale agriculture
- Flood irrigation for gardens
- Water supply for livestock farming
- Lowering groundwater
- Rainwater harvesting
- Emptying of pools, ponds and flooded cellars



FEATURES AND BENEFITS

- Powerful 900W / 1200W motor
- Equipped with 3 or 5 impellers
- Maximum immersion depth of 20 meters
- Maximum delivery head of up to 54 meters
- Professional IPX8 waterproof sealing
- First-class electric shock protection
- Durable, non-corrosive, rust-proof materials
- Integrated float switch, auto start/stop function
- Fitted with 20-meter H07 RN-F 3G 1 mm² cable
- Thermal overload protection
- 2-year guarantee

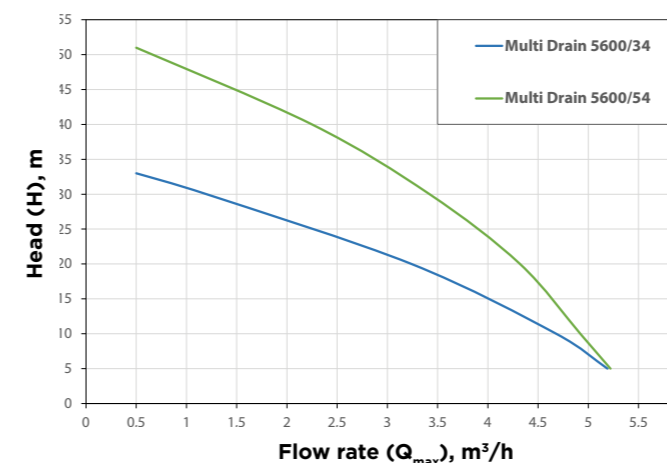

	MULTI DRAIN 5600/34	MULTI DRAIN 5600/54
Maximum power input	900 W	1200 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz
Maximum immersion depth	5 m	5 m
Maximum flow rate	5,6 m ³ /h	5,6 m ³ /h
Maximum delivery head	34 m	54 m
Discharge port diameter	1"	1"
Number of impellers	3	5
Total suspended solids	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	20 m	20 m
Gross weight	10,5 kg	12 kg
Package dimensions	220 x 185 x 420 mm	220 x 185 x 420 mm

NEW

SUBMERSIBLE DEEP-WELL PUMPS FOR CLEAN WATER

BP 1/4 ProLine | BP 3/3 ProLine | BP 10/4 ProLine | BP 14/4 ProLine | BP 18/3 ProLine

Elpumps BP series high-quality, submersible deep-well pumps cover a wide range of domestic and agricultural applications where efficient water pumping from great depths is required for water supply or irrigation purposes and also offer a solution to reduce water shortage problems in remote areas with special climatic or geographic conditions.

The BP series is made with a high-grade INOX stainless steel casing to ensure efficient corrosion resistance and long product life in even the most demanding environments. If connected with a pressure tank, the submersible tube pumps can also operate as domestic waterworks.

STRUCTURE


Elpumps submersible deep-well pumps consist of two main parts, the motor at the bottom and the pump unit on top. The structure allows for quick and easy repair or maintenance as the two units can be disassembled by loosening the screws without difficulty or effort. The reliable long-term operation of the pumps is guaranteed by a motor of up to 1400W, the INOX stainless steel casing with IPX8 waterproof seal, and the 1-18 bronze or high-grade, corrosion-proof NORYL PPO polymer impellers.

FEATURES AND BENEFITS

- Powerful 1000W-1400W motor
- Maximum immersion depth of 10 meters
- Maximum delivery head of up to 90 meters
- 3" or 4" diameter
- Professional IPX8 waterproof sealing
- First-class electric shock protection
- Durable, non-corrosive, rust-proof materials
- Fitted with 20-meter H07 RN-F 4G 1 mm² cable
- Thermal overload protection
- 2-year guarantee

APPLICATION

- Automatic water pumping from deep levels
- Water supply in remote areas with special conditions
- Delivering clean water to operate high-pressure garden irrigation systems
- Creating pressure in water supply systems for small buildings
- Irrigation in greenhouses, horticulture and small-scale agriculture
- Flood irrigation for gardens
- Water supply for livestock farming
- Lowering groundwater

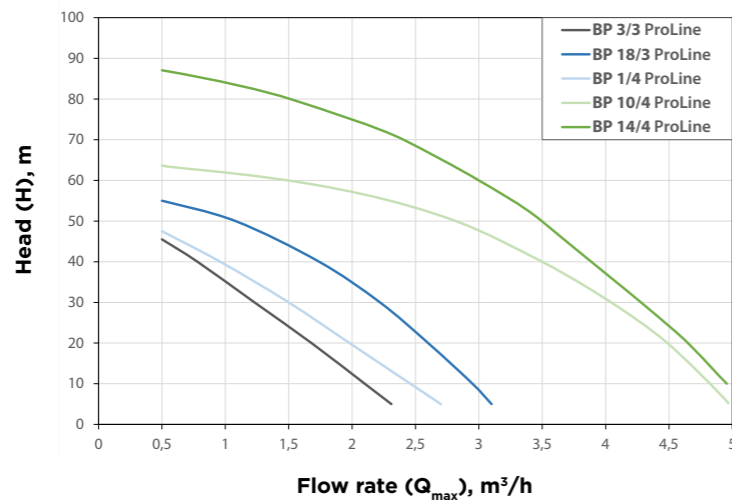

	BP 1/4 ProLine	BP 3/3 ProLine	BP 10/4 ProLine	BP 14/4 ProLine	BP 18/3 ProLine
Maximum power input	1300 W	1100 W	1100 W	1400 W	1000 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum immersion depth	10 m	10 m	10 m	10 m	10 m
Maximum flow rate	3 m ³ /h	2,5 m ³ /h	5,2 m ³ /h	5,2 m ³ /h	3,3 m ³ /h
Maximum delivery head	55 m	57 m	65 m	90 m	60 m
Discharge port diameter	1"	1"	1 1/4"	1 1/4"	1"
Pump diameter	4"	3"	4"	4"	3"
Number of impellers	1	3	10	14	18
Total suspended solids	20 g/m ³	20 g/m ³	20 g/m ³	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 4G 1 mm ²	H07 RN-F 4G 1 mm ²	H07 RN-F 4G 1 mm ²	H07 RN-F 4G 1 mm ²	H07 RN-F 4G 1 mm ²
Power cable length	20 m	20 m	20 m	20 m	20 m
Gross weight	14 kg	11 kg	16 kg	17 kg	13 kg
Package dimensions	220 x 170 x 600 mm	200 x 130 x 570 mm	220 x 170 x 870 mm	220 x 170 x 990 mm	220 x 170 x 1100 mm

CENTRIFUGAL PUMPS

FOR WATER AND OTHER LIQUIDS

PP 60 PP 80

Elpumps PP series centrifugal pumps can be used to deliver clean water or other liquids, for example oil, at high pressure. Centrifugal pumps also allow for convenient and safe irrigation with sprinklers, nozzles and a range of other domestic or gardening applications. Elpumps centrifugal pumps are made of durable, corrosion-proof materials, guaranteeing energy-efficient and quiet operation with high performance and improved reliability.

APPLICATION

- Automatic pumping of clean water from wells, pumping of oil from tanks
- Irrigation in greenhouses, horticulture and small-scale agriculture
- Water supply for livestock farming




STRUCTURE

The internal structural elements within the centrifugal pumps are composed of high-grade, corrosion-proof materials. The impeller is made of cavitation-resistant bronze, the pump casing is made of cast iron. The shaft is sealed with a modern carbon-ceramic mechanical seal.

FEATURES AND BENEFITS

- Powerful 550W-900W motor
- Maximum delivery head of up to 55 m
- Durable, non-corrosive, rust-proof materials
- Fitted with 1-meter H07 RN-F 3G 1 mm² cable
- Thermal overload protection
- 2-year guarantee

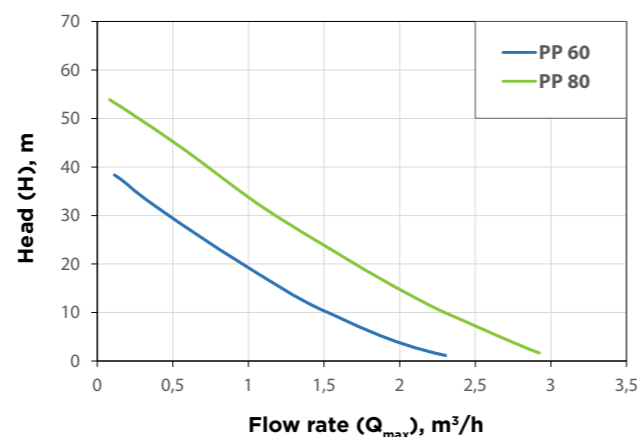


	PP 60	PP 80
Maximum power input	550 W	900 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	2,4 m ³ /h	3,0 m ³ /h
Maximum delivery head	40 m	55 m
Maximum suction head	8 m	8 m
Intake / discharge port diameter	1"	1"
Total suspended solids	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	1 m	1 m
Gross weight	6 kg	9,9 kg
Package dimensions	275 x 195 x 195 mm	295 x 210 x 220 mm

GARDEN JET PUMPS

FOR CLEAN WATER **JPV 800** **JPV 900** **JPP 1300 F** **JPV 1300**

JPV 1300 B **JPV 1300 INOX** **JPV 1500** **JPV 1500 B** **JPV 1500 INOX** **JPV 2000 B**

Elpumps JPV/JPP series garden jet pumps can be used to deliver clean water at high pressure, allowing for convenient and safe irrigation with sprinklers, nozzles and a range of other domestic or gardening applications. Elpumps garden jet pumps are made of durable, corrosion-proof materials and are available with an INOX stainless steel casing, INOX steel impeller and integrated water filter, guaranteeing energy-efficient and quiet operation with high performance and improved reliability. The jet pumps may not be used with saltwater, or aggressive or easily combustible substances, or liquids for human consumption besides water.

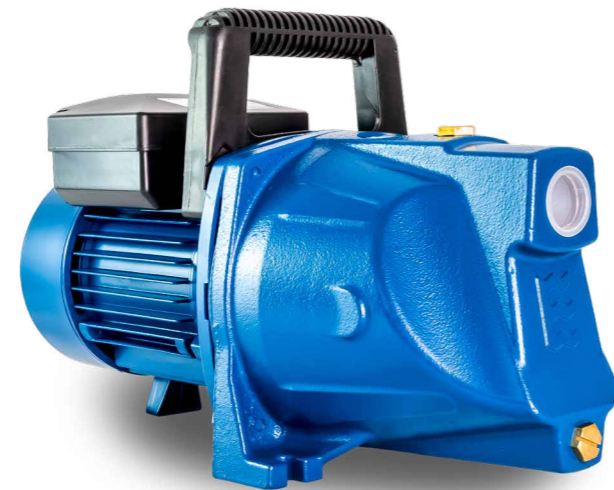


APPLICATION

- Automatic pumping of clean water from wells, tanks or reservoirs
- Delivering clean water to operate high-pressure garden irrigation systems
- Creating pressure in water supply systems for small buildings
- Irrigation in greenhouses, horticulture and small-scale agriculture
- Water supply for livestock farming

STRUCTURE

The internal structural elements within the jet pumps are composed of high-grade, corrosion-proof and cavitation-resistant NORYL PPO polymer or INOX stainless steel, and the pump casing is made of NORYL PPO polymer, cast iron or INOX steel. The shaft is sealed with a modern carbon-ceramic axial seal.

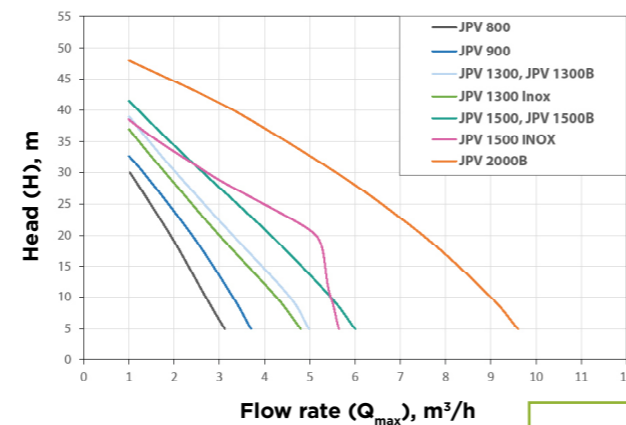

	JPV 800	JPV 900	JPP 1300 F	JPV 1300	JPV 1300 B
Maximum power input	800 W	900 W	1300 W	1300 W	1300 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	3,6 m³/h	3,7 m³/h	4,5 m³/h	5,4 m³/h	5,4 m³/h
Maximum delivery head	40 m	42 m	47 m	47 m	47 m
Maximum suction head	8 m	9 m	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"	1"	1"
Total suspended solids	20 g/m³	20 g/m³	20 g/m³	20 g/m³	20 g/m³
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²
Power cable length	1,5 m	1,5 m	1,5 m	1,5 m	1,5 m
Gross weight	11 kg	13 kg	12 kg	14 kg	14 kg
Package dimensions	430 x 210 x 275 mm	430 x 210 x 275 mm	465 x 280 x 340 mm	430 x 210 x 275 mm	435 x 210 x 275 mm

FEATURES AND BENEFITS

- Powerful 800W–2000W motor
- Maximum delivery head of up to 48 meters
- Durable, non-corrosive, rust-proof materials
- Fitted with 1.5-meter H07 RN-F 3G 1 mm² cable
- Thermal overload protection
- 2-year guarantee

With
INOX
impeller



	JPV 1300 INOX	JPV 1500	JPV 1500 B	JPV 1500 INOX	JPV 2000 B
Maximum power input	1300 W	1500 W	1500 W	1500 W	2000 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	5,4 m³/h	6,3 m³/h	6,3 m³/h	6,0 m³/h	10,2 m³/h
Maximum delivery head	48 m	48 m	48 m	46 m	48 m
Maximum suction head	9 m	9 m	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"	1"	1 ½"
Total suspended solids	20 g/m³	20 g/m³	20 g/m³	20 g/m³	20 g/m³
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²	H07 RN-F 3G 1 mm²
Power cable length	1,5 m	1,5 m	1,5 m	1,5 m	1,5 m
Gross weight	12 kg	15 kg	15 kg	13 kg	24,5 kg
Package dimensions	420 x 230 x 310 mm	435 x 220 x 260 mm	435 x 220 x 260 mm	435 x 220 x 260 mm	435 x 220 x 260 mm

NEW

AUTOMATIC GARDEN PUMPS

FOR CLEAN WATER


JPV 1300 B Automatic

JPV 1300 INOX Automatic

JPV 1500 B Automatic

JPV 1500 INOX Automatic

Elpumps JPV series automatic garden jet pumps can be used to deliver clean water at high pressure, allowing for convenient and safe irrigation with sprinklers, nozzles and a range of other domestic or gardening applications. Elpumps garden jet pumps are made of durable, corrosion-proof materials and are available with an INOX stainless steel casing, INOX steel impeller and integrated water filter, guaranteeing energy-efficient and quiet operation with high performance and improved reliability. The jet pumps may not be used with saltwater, or aggressive or easily combustible substances, or liquids for human consumption besides water.

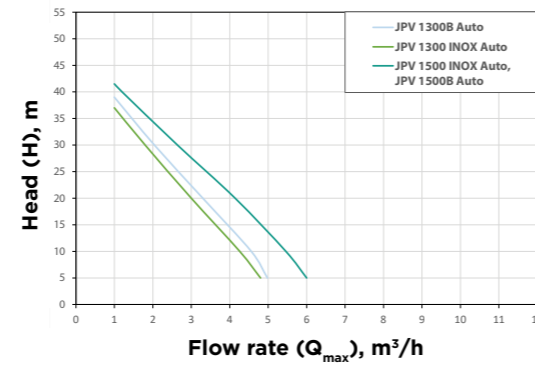

APPLICATION

- Automatic pumping of clean water from wells, tanks or reservoirs
- Delivering clean water to operate high-pressure garden irrigation systems
- Creating pressure in water supply systems for small buildings
- Irrigation in greenhouses, horticulture and small-scale agriculture
- Water supply for livestock farming

STRUCTURE

The internal structural elements within the jet pumps are composed of high-grade, corrosion-proof and cavitation-resistant NORYL PPO polymer or INOX stainless steel, and the pump casing is made of NORYL PPO polymer, cast iron or INOX steel. The shaft is sealed with a modern carbon-ceramic axial seal.

FEATURES AND BENEFITS

- Powerful 1300W-1500W motor
- Maximum pressure of up to 4.8 bar
- Automatic START/STOP function
- Dry-running protection
- Thermal overload protection
- 2-year guarantee


With
**INOX
impeller**

- Thermal overload protection
- 2-year guarantee

- Powerful 1500W motor
- Maximum pressure of up to 4.6 bar
- Flow rate of up to 6,000 liters/hour

- Automatic START/STOP function
- Electronic pressure and flow sensor
- Dry-running protection
- Special non-return valve

- INOX stainless steel impeller and casing

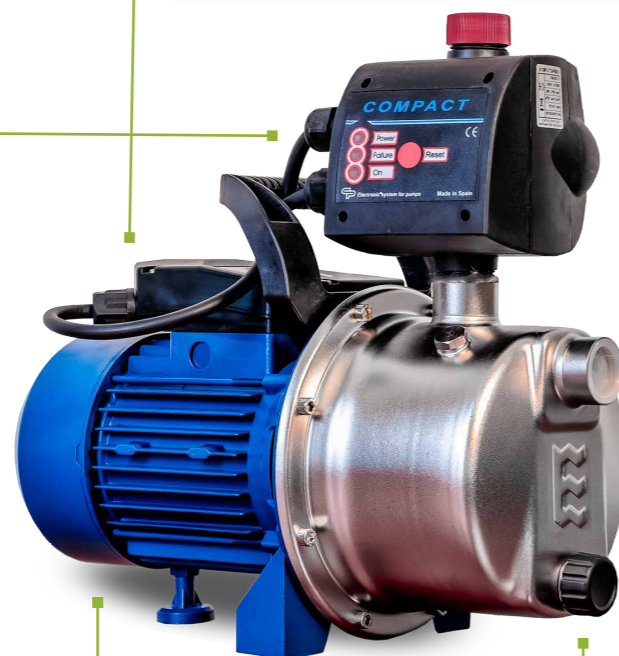

	JPV 1300 B Automatic	JPV 1300 INOX Automatic	JPV 1500 B Automatic	JPV 1500 INOX Automatic
Maximum power input	1300 W	1300 W	1500 W	1500 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	5,4 m ³ /h	5,4 m ³ /h	6,3 m ³ /h	6,0 m ³ /h
Maximum delivery head	47 m	48 m	48 m	46 m
Maximum suction head	9 m	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"	1"
Total suspended solids	20 g/m ³	20 g/m ³	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	1,5 m	1,5 m	1,5 m	1,5 m
Gross weight	17 kg	15 kg	18 kg	16 kg
Package dimensions	435 x 210 x 275 mm	420 x 230 x 310 mm	435 x 220 x 260 mm	435 x 220 x 260 mm

DOMESTIC WATERWORKS, 25L

VB 25/800 VB 25/900 VB 25/1300 VB 25/1300 B VB 25/1300 INOX


VBP 25/1300 INOX VB 25/1500 VB 25/1500 B VB 25/1500 INOX

The Elpumps VB series domestic waterworks offers a complete water supply system with a compact design, delivering clean water from reservoirs or wells to be used in homes or irrigation systems and much more besides. The domestic waterworks are equipped with jet pumps made of durable, corrosion-proof materials, and are available with an INOX stainless steel casing, INOX steel impeller and integrated water filter, guaranteeing energy-efficient and quiet operation with high performance and improved reliability. The robust 800W-1500W motors can deliver up to 6,300 liters of water per hour and generate a continuous water supply with constant pressure. The stainless steel pressure tanks have a capacity of 25L and come with an integrated gauge to read the pressure easily. The domestic waterworks may not be used with saltwater, or aggressive or easily combustible substances, or liquids for human consumption besides water.



APPLICATION


- Automatic pumping of clean water from wells, tanks or reservoirs
- Delivering clean water to operate garden irrigation systems under permanent pressure
- Automatic water supply to houses and gardens requiring constant pressure

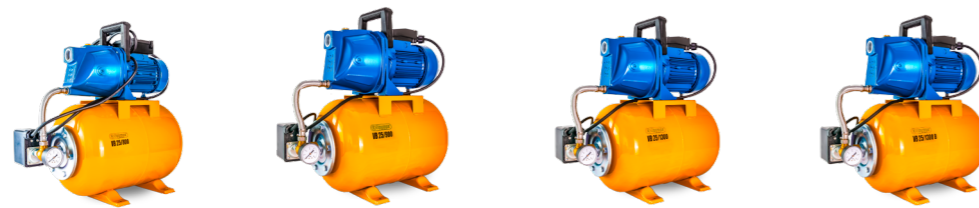

	VB 25/800	VB 25/900	VB 25/1300	VB 25/1300 B
Maximum power input	800 W	900 W	1300 W	1300 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	3,6 m ³ /h	3,7 m ³ /h	5,4 m ³ /h	5,4 m ³ /h
Maximum delivery head	40 m	42 m	47 m	47 m
Maximum suction head	8 m	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"	1"
Container capacity	25 L	25 L	25 L	25 L
Total suspended solids	20 g/m ³	20 g/m ³	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	1,5 m	1,5 m	1,5 m	1,5 m
Gross weight	17 kg	19 kg	20 kg	20 kg
Package dimensions, mm	525 x 285 x 580	525 x 285 x 580	525 x 285 x 580	525 x 285 x 580

FEATURES AND BENEFITS

- Powerful 800W-1500W motor
- Integrated pressure gauge
- 25L pressure tank capacity
- Available with INOX stainless steel pressure tank
- Automatic operation with integrated pressure switch
- Water drain screw for easy draining of residual water
- Durable, non-corrosive, rust-proof materials
- Fitted with 1.5-meter H07 RN-F 3G 1 mm² cable
- Thermal overload protection
- 2-year guarantee

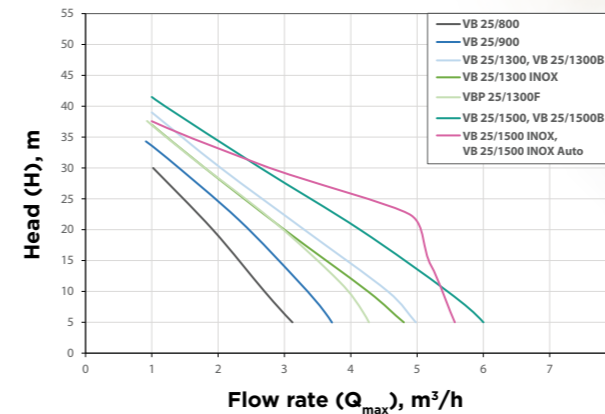

STRUCTURE

The internal structural elements in the jet pumps within the waterworks are composed of high-grade, corrosion-proof and cavitation-resistant NORYL PPO polymer or INOX stainless steel, and the pump casing is made of NORYL PPO polymer, cast iron or INOX steel. The shaft is sealed with a modern carbon-ceramic axial seal. The high-quality flexible bag in the pressure tank is made of BUTYL rubber.

With INOX impellers



	VB 25/1300 INOX	VBP 25/1300 INOX	VB 25/1500	VB 25/1500 B	VB 25/1500 INOX
Maximum power input	1300 W	1300 W	1500 W	1500 W	1500 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	5,4 m ³ /h	5,4 m ³ /h	6,3 m ³ /h	6,3 m ³ /h	6,0 m ³ /h
Maximum delivery head	48 m	48 m	48 m	48 m	46 m
Maximum suction head	9 m	9 m	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"	1"	1"
Container capacity	25 L	25 L	25 L	25 L	25 L
Total suspended solids	20 g/m ³	20 g/m ³	20 g/m ³	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	1,5 m	1,5 m	1,5 m	1,5 m	1,5 m
Gross weight	15 kg	17 kg	21 kg	21 kg	17 kg
Package dimensions, mm	525 x 295 x 590	525 x 285 x 580	525 x 285 x 580	525 x 285 x 580	525 x 285 x 580 mm

AUTOMATIC DOMESTIC WATERWORKS, 25L

VB 25/1300 B Automatic

VB 25/1300 INOX Automatic

VB 25/1500 B Automatic

VB 25/1500 INOX Automatic

The Elpumps VB series automatic domestic waterworks offers a complete water supply system with a compact design, delivering clean water from reservoirs or wells to be used in homes or irrigation systems and much more besides. The domestic waterworks are equipped with jet pumps made of durable, corrosion-proof materials, and are available with an INOX stainless steel casing, INOX steel impeller and integrated water filter, guaranteeing energy-efficient and quiet operation with high performance and improved reliability. The robust 1300W-1500W motors can deliver up to 6,300 liters of water per hour and generate a continuous water supply with constant pressure. The stainless steel pressure tanks have a capacity of 25 liters and come with an integrated gauge to read the pressure easily. The domestic waterworks may not be used with saltwater, or aggressive or easily combustible substances, or liquids for human consumption besides water.

APPLICATION

- Automatic pumping of clean water from wells, tanks or reservoirs
- Delivering clean water to operate garden irrigation systems under permanent pressure
- Automatic water supply to houses and gardens requiring constant pressure



	VB 25/1300 B Automatic	VB 25/1300 INOX Automatic	VB 25/1500 B Automatic	VB 25/1500 INOX Automatic
Maximum power input	1300 W	1300 W	1500 W	1500 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	5,4 m ³ /h	5,4 m ³ /h	6,3 m ³ /h	6,0 m ³ /h
Maximum delivery head	47 m	48 m	48 m	46 m
Maximum suction head	9 m	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"	1"
Container capacity	25 L	25 L	25 L	25 L
Total suspended solids	20 g/m ³	20 g/m ³	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	1,5 m	1,5 m	1,5 m	1,5 m
Gross weight	20 kg	15 kg	21 kg	20 kg
Package dimensions, mm	525 x 285 x 580 mm	525 x 295 x 590 mm	525 x 285 x 580 mm	525 x 295 x 590 mm



- Automatic START/STOP function
- Electronic pressure switch
- Digital pressure gauge
- Dry-running protection
- Overcurrent protection
- Inner non-return valve
- Automatic Reset Test
- Adjustable turn-on/turn off pressure
- Control panel with 3-digit display
- LED indicator lights

- Thermal overload protection
- 2-year guarantee

- Powerful 1500W motor
- Maximum pressure of up to 4.6 bar
- Flow rate of up to 6,000 liters/hour

• INOX stainless steel impeller and casing

• 25L INOX stainless steel pressure tank

DOMESTIC WATERWORKS, 50L

- VB 50/1300
- VB 50/1300 B
- VB 50/1300 INOX
- VB 50/1500
- VB 50/1500 B
- VB 50/1500 B INOX

The Elpumps VB series domestic waterworks offers a complete water supply system with a compact design, delivering clean water from reservoirs or wells to be used in homes or irrigation systems and much more besides. The domestic waterworks are equipped with jet pumps made of durable, corrosion-proof materials, and are available with an INOX stainless steel casing, INOX steel impeller and integrated water filter, guaranteeing energy-efficient and quiet operation with high performance and improved reliability. The robust 1300W-1500W motors can deliver up to 6,300 liters of water per hour and generate a continuous water supply with constant pressure. The stainless steel pressure tanks have a capacity of 50 liters and come with an integrated gauge to read the pressure easily. The domestic waterworks may not be used with saltwater, or aggressive or easily combustible substances, or liquids for human consumption besides water.




APPLICATION

- Automatic pumping of clean water from wells, tanks or reservoirs
- Delivering clean water to operate garden irrigation systems under permanent pressure
- Automatic water supply to houses and gardens requiring constant pressure



FEATURES AND BENEFITS

- Powerful 1300W-1500W motor
- Integrated pressure gauge
- 50L pressure tank capacity
- Available with INOX stainless steel pressure tank
- Automatic operation with integrated pressure switch
- Water drain screw for easy draining of residual water
- Durable, non-corrosive, rust-proof materials
- Fitted with 1.5-meter H07 RN-F 3G 1 mm² cable
- Thermal overload protection
- 2-year guarantee

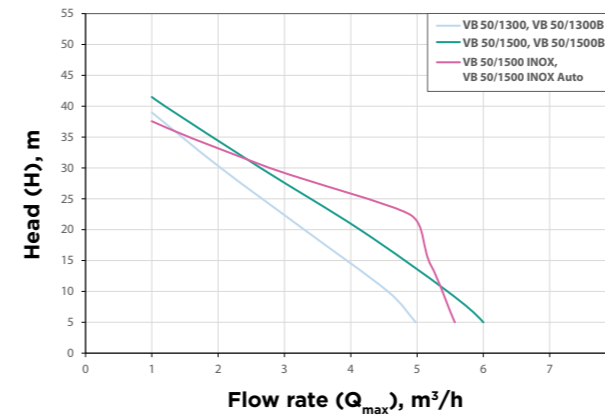

STRUCTURE

The internal structural elements in the jet pumps within the waterworks are composed of high-grade, corrosion-proof and cavitation-resistant NORYL PPO polymer or INOX stainless steel, and the pump casing is made of NORYL PPO polymer, cast iron or INOX steel. The shaft is sealed with a modern carbon-ceramic axial seal. The high-quality flexible bag in the pressure tank is made of BUTYL rubber.

With INOX impellers

	VB 50/1300	VB 50/1300 B	VB 50/1300 INOX
Maximum power input	1300 W	1300 W	1300 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	5,4 m ³ /h	5,4 m ³ /h	5,4 m ³ /h
Maximum delivery head	47 m	47 m	48 m
Maximum suction head	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"
Container capacity	50 L	50 L	50 L
Total suspended solids	20 g/m ³	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	1,5 m	1,5 m	1,5 m
Gross weight	22,5 kg	22,5 kg	23 kg
Package dimensions, mm	525 x 285 x 580	525 x 285 x 580	525 x 295 x 590

	VB 50/1500	VB 50/1500 B	VB 50/1500 INOX
Maximum power input	1500 W	1500 W	1500 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	6,3 m ³ /h	6,3 m ³ /h	6,0 m ³ /h
Maximum delivery head	48 m	48 m	46 m
Maximum suction head	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"
Container capacity	50 L	50 L	50 L
Total suspended solids	20 g/m ³	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	1,5 m	1,5 m	1,5 m
Gross weight	24 kg	24 kg	17 kg
Package dimensions, mm	525 x 285 x 580	525 x 285 x 580	525 x 285 x 580

AUTOMATIC DOMESTIC WATERWORKS, 50 L

VB 50/1300 B Automatic

VB 50/1300 INOX Automatic

VB 50/1500 B Automatic

VB 50/1500 INOX Automatic

The Elpumps VB series automatic domestic waterworks offers a complete water supply system with a compact design, delivering clean water from reservoirs or wells to be used in homes or irrigation systems and much more besides. The domestic waterworks are equipped with jet pumps made of durable, corrosion-proof materials, and are available with an INOX stainless steel casing, INOX steel impeller and integrated water filter, guaranteeing energy-efficient and quiet operation with high performance and improved reliability. The robust 1300W-1500W motors can deliver up to 6,300 liters of water per hour and generate a continuous water supply with constant pressure. The stainless steel pressure tanks have a capacity of 50 liters and come with an integrated gauge to read the pressure easily. The domestic waterworks may not be used with saltwater, or aggressive or easily combustible substances, or liquids for human consumption besides water.

APPLICATION

- Automatic pumping of clean water from wells, tanks or reservoirs
- Delivering clean water to operate garden irrigation systems under permanent pressure
- Automatic water supply to houses and gardens requiring constant pressure



	VB 50/1300 B Automatic	VB 50/1300 INOX Automatic	VB 50/1500 B Automatic	VB 50/1500 INOX Automatic
Maximum power input	1300 W	1300 W	1500 W	1300 W
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Maximum flow rate	5,4 m ³ /h	5,4 m ³ /h	6,3 m ³ /h	6,0 m ³ /h
Maximum delivery head	47 m	47 m	48 m	46 m
Maximum suction head	9 m	9 m	9 m	9 m
Intake / discharge port diameter	1"	1"	1"	1"
Container capacity	50 L	50 L	50 L	50 L
Total suspended solids	20 g/m ³	20 g/m ³	20 g/m ³	20 g/m ³
Maximum delivery temperature	35 °C	35 °C	35 °C	35 °C
Power cable type	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²	H07 RN-F 3G 1 mm ²
Power cable length	1,5 m	1,5 m	1,5 m	1,5 m
Gross weight	22,5 kg	22,5 kg	24 kg	22,5 kg
Package dimensions, mm	525 x 285 x 610 mm	525 x 285 x 610 mm	525 x 285 x 610 mm	525 x 285 x 610 mm



- Automatic START/STOP function
- Electronic pressure switch
- Digital pressure gauge
- Dry-running protection
- Overcurrent protection
- Inner non-return valve
- Automatic Reset Test
- Adjustable turn-on/turn off pressure
- Control panel with 3-digit display
- LED indicator lights

- Thermal overload protection
- 2-year guarantee

- Powerful 1500W motor
- Maximum pressure of up to 4.6 bar
- Flow rate of up to 6,000 liters/hour



• INOX stainless steel impeller and casing

• 50L INOX stainless steel pressure tank

ACCESSORIES

PUMP PRE-FILTER 1L



- Filter with high-quality filter membrane
- Easy installation and maintenance
- 1" intake / discharge port diameter
- Compatible with all Elpumps JPV/VB pumps with 1" connection
- Must be installed before the intake port
- Protects the pump from sand and other obstacles

DSK 10 PRESSURE SWITCH AND DRY-RUNNING PROTECTION



- Protects the pump against dry-running
- Turns the pump on / off depending on water usage
- Operational pressure between 1.5 bar - 10.0 bar
- Integrated check valve and pressure gauge
- Compatible with all Elpumps JPV/VB pumps with 1" connection
- Must be installed after the discharge port

PRESSURE TANK 80 L



- 80L pressure tank capacity
- 1" intake / discharge port diameter
- Integrated pressure gauge

PRESSURE TANK 25 L



- 25L pressure tank capacity
- 1" intake / discharge port diameter
- Compatible with all Elpumps JPV/JPP/VB/VBP pumps

PRESSURE TANK 50 L



- 50L pressure tank capacity
- 1" intake / discharge port diameter
- Compatible with all Elpumps JPV/JPP/VB/VBP pumps

INOX PRESSURE TANK 25 L



- 25L pressure tank capacity
- 1" intake / discharge port diameter
- Compatible with all Elpumps JPV/JPP/VB/VBP pumps
- Made of INOX stainless steel

INOX PRESSURE TANK 50 L



- 50L pressure tank capacity
- 1" intake / discharge port diameter
- Compatible with all Elpumps JPV/JPP/VB/VBP pumps
- Made of INOX stainless steel

TABLE OF CONTENTS

CLEAN WATER PUMPS

CT 3274 W	600W, 10 m ³ /h, 10 m	5999881825015
CT 4274 S	800W, 15 m ³ /h, 12 m	5999881825039
CT 3674	600W, 10.8 m ³ /h, 8 m	5999881825664

SUMP PUMPS

CT 2274 S	450W, 9 m ³ /h, 6 m	5999881825206
CT 3274 S	650W, 14 m ³ /h, 8 m	5999881825473
CT 4274 S	850W, 16 m ³ /h, 10 m	5999881825480

DIRTY WATER PUMPS

BTSZ 400	1200W, 24 m ³ /h, 10 m	5999881825145
BTSZ 400 SPECIAL	1200W, 24 m ³ /h, 11 m	5999881825718
BTSZ 600 SPECIAL	1600W, 32 m ³ /h, 12 m	5999881825725
NEPTUN	800W, 15 m ³ /h, 9 m	5999881825336
NEPTUN INOX	800W, 15 m ³ /h, 9 m	5999881825152

SEWAGE PUMPS

BT 4877 K	900W, 20 m ³ /h, 10 m	5999881825046
BT 4877 K INOX	900W, 20 m ³ /h, 10 m	5999881825312
BT 4877 K SPECIAL	900W, 22 m ³ /h, 10 m	5999881825695
BT 6877 K	1600W, 26 m ³ /h, 18 m	5999881825121
BT 6877 K INOX	1600W, 26 m ³ /h, 18 m	5999881825329
BT 6877 K SPECIAL	1600W, 28 m ³ /h, 18 m	5999881825701

HIGH-PRESSURE SUBMERSIBLE PUMPS

Multi Drain 5600/34	900W, 5.6 m ³ /h, 34 m	5999881825848
Multi Drain 5600/54	1200W, 5.6 m ³ /h, 54 m	5999881825855

DEEP WELL PUMPS

BP 1/4	1300W, 3 m ³ /h, 55 m	5999881825633
BP 3/3	1100W, 2.5 m ³ /h, 57 m	5999881825770
BP 10	1400W, 4.5 m ³ /h, 65 m	5999881825077
BP 14	1600W, 4.5 m ³ /h, 90 m	5999881825176
BP 18/3	1000W, 3.3 m ³ /h, 60 m	5999881825428

CENTRIFUGAL PUMPS

PP 60	550W, 2.4 m ³ /h, 40 m	5999881825893
PP 80	750W, 3.0 m ³ /h, 55 m	5999881825909

GARDEN PUMPS

JPV 800	800W, 3.6 m ³ /h, 40 m	5999881825824
JPV 900	900W, 3.7 m ³ /h, 42 m	5999881825084
JPP 1300 F	1300W, 4.5 m ³ /h, 47 m	5999881825732
JPV 1300	1300W, 5.4 m ³ /h, 47 m	5999881825091
JPV 1300 B	1300W, 5.4 m ³ /h, 47 m	5999881825343
JPV 1300 INOX	1300W, 5.4 m ³ /h, 48 m	5999881825268
JPV 1500	1500W, 6.3 m ³ /h, 48 m	5999881825169
JPV 1500 B	1500W, 6.3 m ³ /h, 48 m	5999881825350
JPV 1500 INOX	1500W, 6.0 m ³ /h, 46 m	5999881825572
JPV 2000 B	2000W, 10.2 m ³ /h, 48 m	5999881825794

6 AUTOMATIC GARDEN PUMPS

JPV 1300 B Automatic	1300W, 5.4 m ³ /h, 47 m	5999881825558
JPV 1300 INOX Automatic	1300W, 5.4 m ³ /h, 48 m	5999881825138
JPV 1500 B Automatic	1500W, 6.3 m ³ /h, 48 m	5999881825565
JPV 1500 INOX Automatic	1500W, 6.0 m ³ /h, 46 m	5999881825589

8 DOMESTIC WATERWORKS, 25 L

VB 25/800	800W, 3.6 m ³ /h, 40 m	5999881825831
VB 25/900	900W, 3.7 m ³ /h, 42 m	5999881825107
VB 25/1300	1300W, 5.4 m ³ /h, 47 m	5999881825114
VB 25/1300 B	1300W, 5.4 m ³ /h, 47 m	5999881825398
VB 25/1300 INOX	1300W, 5.4 m ³ /h, 48 m	5999881825596
VB 25/1300 INOX	1300W, 5.4 m ³ /h, 48 m	5999881825749
VB 25/1500	1500W, 6.3 m ³ /h, 48 m	5999881825404
VB 25/1500 B	1500W, 6.3 m ³ /h, 48 m	5999881825411
VB 25/1500 INOX	1500W, 6.0 m ³ /h, 46 m	5999881825978

10 AUTOMATIC DOMESTIC WATERWORKS, 25 L

VB 25/1300 B Automatic	1300W, 5.4 m ³ /h, 47 m	5999881825619
VB 25/1300 INOX Automatic	1300W, 5.4 m ³ /h, 48 m	5999881825367
VB 25/1500 B Automatic	1500W, 6.3 m ³ /h, 48 m	5999881825541
VB 25/1500 INOX Automatic	1500W, 6.0 m ³ /h, 46 m	5999881825183

12 DOMESTIC WATERWORKS, 50 L

VB 50/1300	1300W, 5.4 m ³ /h, 47 m	5999881825640
VB 50/1300 B	1300W, 5.4 m ³ /h, 47 m	5999881825756
VB 50/1500	1500W, 6.3 m ³ /h, 48 m	5999881825657
VB 50/1500 B	1500W, 6.3 m ³ /h, 48 m	5999881825763
VB 50/1300 INOX	1300W, 5.4 m ³ /h, 48 m	5999881825381
VB 50/1500 INOX	1500W, 6.0 m ³ /h, 46 m	5999881825978

14 AUTOMATIC DOMESTIC WATERWORKS, 50 L

VB 50/1300 B Automatic	1300W, 5.4 m ³ /h, 47 m	5999881825190
VB 50/1300 INOX Automatic	1300W, 5.4 m ³ /h, 48 m	5999881825244
VB 50/1500 B Automatic	1500W, 6.3 m ³ /h, 48 m	5999881825220
VB 50/1500 INOX Automatic	1500W, 6.0 m ³ /h, 46 m	5999881825602

16 ACCESSORIES

1L Filter	5999881825282
DSK-10	5999881825299
Pressure tank 25 L	5999881825886
INOX Pressure tank 25 L	5999881825688
Pressure tank 50 L	5999881825817
INOX Pressure tank 50 L	5999881825800
Pressure tank 80 L	5999881825800

Elpumps Ltd.

Phone +36 44 510 530

Email laszlo.aranyosi@elpumps.hu

Website www.elpumps.hu

